

Linux CentOS 7 Installation



NetVizura needs dedicated server

For security reason, make sure that your server or VM doesn't have anything installed on it before NetVizura installation. Other software or services running on the same server can impact installation.



NetVizura needs correct time

Before installing NetVizura make sure to set the time on your server correctly. Time change after the installation will invalidate the license!



NetVizura installation needs internet access

NetVizura requires working connection to the internet to install required dependent software. After installation is successful you can turn off internet access for NetVizura server.

On this page:

- [Installation Steps](#)
- [Post Install Steps](#)
 - [Tweaking PostgreSQL](#)
 - [Tomcat Memory Allocation](#)

Installation Steps



To be able to install NetVizura, you will need a root privileges.

To install NetVizura follow these steps:

Step 1: Download and execute Centos 7 prerequisites script:

```
su -
yum install wget -y
wget https://www.netvizura.com/files/products/general/downloads/netvizura-5.2-prerequisites-centos7.sh --output-document=/tmp/netvizura-prerequisites-centos7.sh
bash /tmp/netvizura-prerequisites-centos7.sh
```

Step 2: Installing NetVizura package

Download NetVizura RPM package from [NetVizura website](#) to NetVizura server's /tmp directory and execute the following command:

```
yum -y localinstall /tmp/netvizura-package.rpm
```

Step 3(optional): Install Elasticsearch

```
wget https://www.netvizura.com/files/products/general/downloads/elasticsearch-prerequisites-centos.sh --output-document=/tmp/elasticsearch-prerequisites-centos.sh
bash /tmp/elasticsearch-prerequisites-centos.sh
```

To learn more about why this is an optional step at the moment read [Why is Elasticsearch currently just an option?](#)

Step 4: Verify installation

Now you can go to NetVizura web interface http://<netvizura_server_ip>:8080/netvizura.


Default login credentials:



In case you have installed newer version of PostgreSQL, use different PostgreSQL service name, that matches your PostgreSQL version, in the commands from the Step 3.

- Username: **admin**
- Password: **admin01**

For example, if your server IP is 1.1.1.1 then point your browser to <http://1.1.1.1:8080/netvizura> like in the screenshot below:

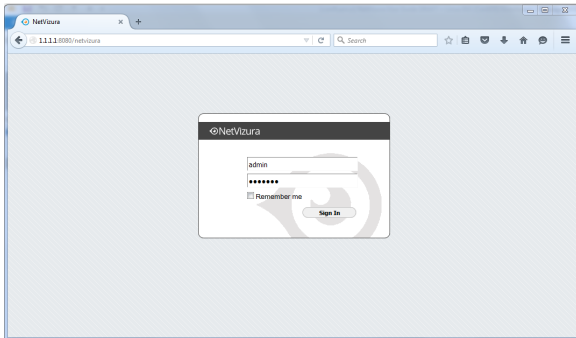

Post Install Steps

After installation tweaking of configuration files is required in order to utilize the installed RAM to the fullest extent. The main consumers of RAM are operating system, PostgreSQL database and Tomcat. General rule for distributing memory is to split it in ratio 2:1 between PostgreSQL and Tomcat with 1 GB or more reserved for operating system.

For instance:

Installed RAM	PostgreSQL	Tomcat	OS
4 GB	2 GB	1 GB	1 GB
16 GB	10 GB	5 GB	1 GB

Tweaking PostgreSQL

Tweaking PostgreSQL for best performance is a topic on which many books were written, but the following are some common sense suggestions. For the curious ones recommended reads (among countless others) are [PostgreSQL Optimization Guide](#) and [PostgreSQL Tuning Guide](#).

In order to apply following tweaks edit file `/var/lib/pgsql/PG_VERSION_NUMBER/data/postgresql.conf`. You will need to restart the PostgreSQL service after done editing with command: `service postgresql restart`. Almost all of the following parameters are commented with caron character (#). Be aware that if you comment out the parameter that has been changed, PostgreSQL will revert to the default value.

In the following example it is assumed that 4 GB of RAM is allocated for PostgreSQL.



Before changing any parameters in postgresql configuration read the provided comments in the table below for more information regarding specific parameter.

parameter	recommended value	comment
max_connections	30	NetVizura rarely uses more than 10 connections simultaneously, but it is good to have some reserve.
shared_buffers	1024MB	The recommended amount is $RAM/4$.
effective_cache_size	2048MB	The recommended amount is $RAM/2$, possibly even $RAM * 3/4$.
checkpoint_completion_target	0.7	This parameter can take values between 0 and 1. Default is set to 0.5, which means that the write phase of checkpoint process will take half of the checkpoint timeout time. Increasing this value will provide more time for checkpoint write phase to finish, thus decreasing IO usage.
work_mem	32-64MB	The formula used is $max_connections * work_mem \leq RAM/4$, but using a bit more is still fine.

maintenanc e_work_m em	256MB	Speeds up DB self clean process. Usually 4*work_mem or something in that ballpark
wal_buffe rs	16MB	Increasing wal_buffers is helpful for write-heavy systems. Usually this is 16MB.
min_wal_s ize	1GB	If WAL files are under this size, files will be recycled for future checkpoints.
max_wal_s ize	2GB	Maximum size of WAL files, after that CHECKPOINT command is be issued and files are written to disk.
effective _io_concu rrency	2	Number of simultaneous request that can be handled efficiently by disk subsystem.
full_page _writes	off	Turning this parameter off speeds up normal operation, but might lead to either unrecoverable data corruption, or silent data corruption, after power outage, OS or HDD failure. The risks are similar to turning off fsync, though smaller.
fsync	off	Don't wait for HDD to finish previous write operation. This brings the most benefit, but if there is power outage, OS or HDD failure in exact instant when PSQL issues write command to HDD, that data will be lost and the DB itself could be corrupted. On the other hand, DB can issue several magnitude more write commands in the same time period and consider all these done, thus improving write performance immensely.
synchrono us_commit	off	Similarly to "fsync" but with less benefit.
Parallel system optimization (PSQL => 9.6)		
max_worke r_process es	2	Number of cores
max_paral lel_worke rs_per_ga ther	1	Number of cores/2
(PSQL > 9.6) max_paral lel_work ers	2	Number of cores

Tomcat Memory Allocation

During installation NetVizura automatically allocates memory for Tomcat process. The amount allocated to Tomcat process is calculated according to the formula:

$(RAM_{total} - 1GB) / 3$ but no less than 1GB.

For instance:

Total RAM	Tomcat
3 GB	1 GB
4 GB	1 GB
16 GB	5 GB

However, if you need to tweak Tomcat RAM allocation differently (the example for 2048MB):

1. Edit file /etc/tomcat/conf.d/netvizura.conf
2. Locate JAVA_OPTS environment variable that defines memory This line looks something like the following:
JAVA_OPTS="{JAVA_OPTS} -Xmx1024m -Xms1024m"
3. Modify the -Xmx and -Xms to the same amount. This should look something like:
JAVA_OPTS="{JAVA_OPTS} -Xmx2048M -Xms2048M"
4. Save the file and restart Tomcat: `systemctl restart tomcat.service`